

MACHINE LEVELLING FEET

SF621

Articulated machine foot with protective sleeve in stainless steel and hygienic design. Able to handle heavy loads and can be angled 10 degrees. Hexagon grip on the screw for easy assembly and adjustment. Two holes in the base for floor mounting.



MATERIAL FASTENERS

Stainless steel


ADDITIONAL INFO

Material: Stainless steel

Felt: False

Articulated: True

Hexagon socket at the top: False

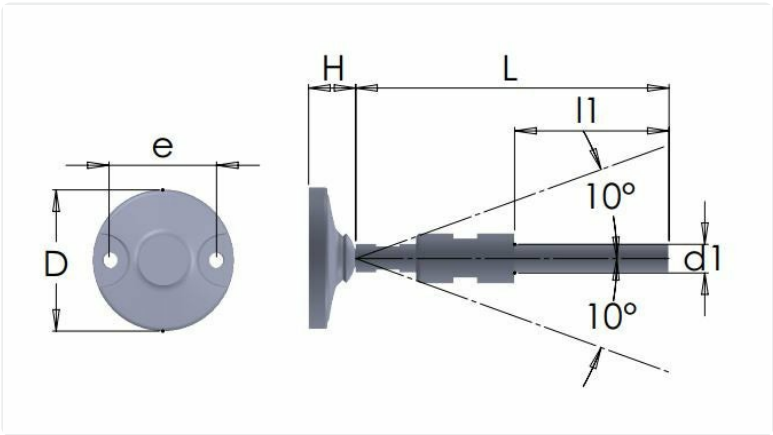

Article number	Material fasteners	Color	D	d1	e	H	L	l1	Max. limit static load (kg)
SF621-190-78M12X135	-	-	78	M12	58	25	135	55	1800
SF621-190-78M12X175	-	-	78	M12	58	25	175	75	1600
SF621-190-78M12X215	-	-	78	M12	58	25	215	95	1400
SF621-190-78M16X135	-	-	78	M16	58	25	135	55	3000
SF621-190-78M16X175	-	-	78	M16	58	25	175	75	2700
SF621-190-78M16X215	-	-	78	M16	58	25	215	95	2400
SF621-190-78M16X255	-	-	78	M16	58	25	255	115	2100
SF621-190-78M20X135	-	-	78	M20	58	25	135	55	4800

Article number	Material fasteners	Color	D	d1	e	H	L	l1	Max. limit static load (kg)
SF621-190-78M20X175	-	-	78	M20	58	25	175	75	4800
SF621-190-78M20X215	-	-	78	M20	58	25	215	95	4800
SF621-190-78M20X255	-	-	78	M20	58	25	255	115	4400
SF621-190-78M24X135	-	-	78	M24	58	25	135	55	6800
SF621-190-78M24X175	-	-	78	M24	58	25	175	75	6800
SF621-190-78M24X215	-	-	78	M24	58	25	215	95	6800
SF621-190-78M24X255	-	-	78	M24	58	25	255	115	6400
SF621-190-78M30X135	-	-	78	M30	58	25	135	55	11000
SF621-190-78M30X175	-	-	78	M30	58	25	175	75	11000
SF621-190-78M30X215	-	-	78	M30	58	25	215	95	11000
SF621-190-78M30X255	-	-	78	M30	58	25	255	115	11000
SF621-190-98M12X135	-	-	98	M12	71.5	25	135	55	1800
SF621-190-98M12X175	-	-	98	M12	71.5	25	175	75	1600
SF621-190-98M12X215	-	-	98	M12	71.5	25	215	95	1400
SF621-190-98M16X135	-	-	98	M16	71.5	25	135	55	3000
SF621-190-98M16X175	-	-	98	M16	71.5	25	175	75	2700
SF621-190-98M16X215	-	-	98	M16	71.5	25	215	95	2400
SF621-190-98M16X255	-	-	98	M16	71.5	25	255	115	2100
SF621-190-98M20X135	-	-	98	M20	71.5	25	135	55	4800
SF621-190-98M20X175	-	-	98	M20	71.5	25	175	75	4800
SF621-190-98M20X215	-	-	98	M20	71.5	25	215	95	4800
SF621-190-98M20X255	-	-	98	M20	71.5	25	255	115	4400
SF621-190-98M24X135	-	-	98	M24	71.5	25	135	55	6800
SF621-190-98M24X175	-	-	98	M24	71.5	25	175	75	6800
SF621-190-98M24X215	-	-	98	M24	71.5	25	215	95	6800
SF621-190-98M24X255	-	-	98	M24	71.5	25	255	115	6400
SF621-190-98M30X135	-	-	98	M30	71.5	25	135	55	11000
SF621-190-98M30X175	-	-	98	M30	71.5	25	175	75	11000
SF621-190-98M30X215	-	-	98	M30	71.5	25	215	95	11000
SF621-190-98M30X255	-	-	98	M30	71.5	25	255	115	11000
SF621-190-98M36X135	-	-	98	M36	71.5	25	135	55	11000
SF621-190-98M36X175	-	-	98	M36	71.5	25	175	75	11000
SF621-190-98M36X215	-	-	98	M36	71.5	25	215	95	11000
SF621-190-98M36X255	-	-	98	M36	71.5	25	255	115	11000
SF621-190-118M16X135	-	-	118	M16	85.5	25	135	55	3000
SF621-190-118M16X175	-	-	118	M16	85.5	25	175	75	2700
SF621-190-118M16X215	-	-	118	M16	85.5	25	215	95	2400
SF621-190-118M16X255	-	-	118	M16	85.5	25	255	115	2100
SF621-190-118M20X135	-	-	118	M20	85.5	25	135	55	4800
SF621-190-118M20X175	-	-	118	M20	85.5	25	175	75	4800

Article number	Material fasteners	Color	D	d1	e	H	L	I1	Max. limit static load (kg)
SF621-190-118M20X215	-	-	118	M20	85.5	25	215	95	4800
SF621-190-118M20X255	-	-	118	M20	85.5	25	255	115	4400
SF621-190-118M24X135	-	-	118	M24	85.5	25	135	55	6800
SF621-190-118M24X175	-	-	118	M24	85.5	25	175	75	6800
SF621-190-118M24X215	-	-	118	M24	85.5	25	215	95	6800
SF621-190-118M24X255	-	-	118	M24	85.5	25	255	115	6400
SF621-190-118M30X135	-	-	118	M30	85.5	25	135	55	11000
SF621-190-118M30X175	-	-	118	M30	85.5	25	175	75	11000
SF621-190-118M30X215	-	-	118	M30	85.5	25	215	95	11000
SF621-190-118M30X255	-	-	118	M30	85.5	25	255	115	11000
SF621-190-118M36X135	-	-	118	M36	85.5	25	135	55	11000
SF621-190-118M36X175	-	-	118	M36	85.5	25	175	75	11000
SF621-190-118M36X215	-	-	118	M36	85.5	25	215	95	11000
SF621-190-118M36X255	-	-	118	M36	85.5	25	255	115	11000
SF621-190-138M16X135	-	-	138	M16	105.5	26	135	55	3000
SF621-190-138M16X175	-	-	138	M16	105.5	26	175	75	2700
SF621-190-138M16X215	-	-	138	M16	105.5	26	215	95	2400
SF621-190-138M16X255	-	-	138	M16	105.5	26	255	115	2100
SF621-190-138M20X135	-	-	138	M20	105.5	26	135	55	4800
SF621-190-138M20X175	-	-	138	M20	105.5	26	175	75	4800
SF621-190-138M20X215	-	-	138	M20	105.5	26	215	95	4800
SF621-190-138M20X255	-	-	138	M20	105.5	26	255	115	4400
SF621-190-138M24X135	-	-	138	M24	105.5	26	135	55	6800
SF621-190-138M24X175	-	-	138	M24	105.5	26	175	75	6800
SF621-190-138M24X215	-	-	138	M24	105.5	26	215	95	6800
SF621-190-138M24X255	-	-	138	M24	105.5	26	255	115	6400
SF621-190-138M30X135	-	-	138	M30	105.5	26	135	55	11000
SF621-190-138M30X175	-	-	138	M30	105.5	26	175	75	11000
SF621-190-138M30X215	-	-	138	M30	105.5	26	215	95	11000
SF621-190-138M30X255	-	-	138	M30	105.5	26	255	115	11000
SF621-190-138M36X135	-	-	138	M36	105.5	26	135	55	11000
SF621-190-138M36X175	-	-	138	M36	105.5	26	175	75	11000
SF621-190-138M36X215	-	-	138	M36	105.5	26	215	95	11000
SF621-190-138M36X255	-	-	138	M36	105.5	26	255	115	11000
SF621-190-158M16X135	-	-	158	M16	125.5	27	135	55	3000
SF621-190-158M16X175	-	-	158	M16	125.5	27	175	75	2700
SF621-190-158M16X215	-	-	158	M16	125.5	27	215	95	2400
SF621-190-158M16X255	-	-	158	M16	125.5	27	255	115	2100
SF621-190-158M20X135	-	-	158	M20	125.5	27	135	55	4800
SF621-190-158M20X175	-	-	158	M20	125.5	27	175	75	4800

Article number	Material fasteners	Color	D	d1	e	H	L	l1	Max. limit static load (kg)
SF621-190-158M20X215	-	-	158	M20	125.5	27	215	95	4800
SF621-190-158M20X255	-	-	158	M20	125.5	27	255	115	4400
SF621-190-158M24X135	-	-	158	M24	125.5	27	135	55	6800
SF621-190-158M24X175	-	-	158	M24	125.5	27	175	75	6800
SF621-190-158M24X215	-	-	158	M24	125.5	27	215	95	6800
SF621-190-158M24X255	-	-	158	M24	125.5	27	255	115	6400
SF621-190-158M30X135	-	-	158	M30	125.5	27	135	55	11000
SF621-190-158M30X175	-	-	158	M30	125.5	27	175	75	11000
SF621-190-158M30X215	-	-	158	M30	125.5	27	215	95	11000
SF621-190-158M30X255	-	-	158	M30	125.5	27	255	115	11000
SF621-190-158M36X135	-	-	158	M36	125.5	27	135	55	11000
SF621-190-158M36X175	-	-	158	M36	125.5	27	175	75	11000
SF621-190-158M36X215	-	-	158	M36	125.5	27	215	95	11000
SF621-190-158M36X255	-	-	158	M36	125.5	27	255	115	11000