

MACHINE LEVELLING FEET

SF331

Articulated levelling machine foot in stainless steel with hygienic design. Are able to handle heavy-duty and can be angeled 10 degrees. Hexagon grip at the screw for easy assembly and adjustment. No-slip disk and with a sealing protective sleeve that easily adjusts on the screw



MATERIAL FASTENERS

Stainless steel


ADDITIONAL INFO

Material: Stainless steel

Felt: False

Articulated: True

Hexagon socket at the top: False

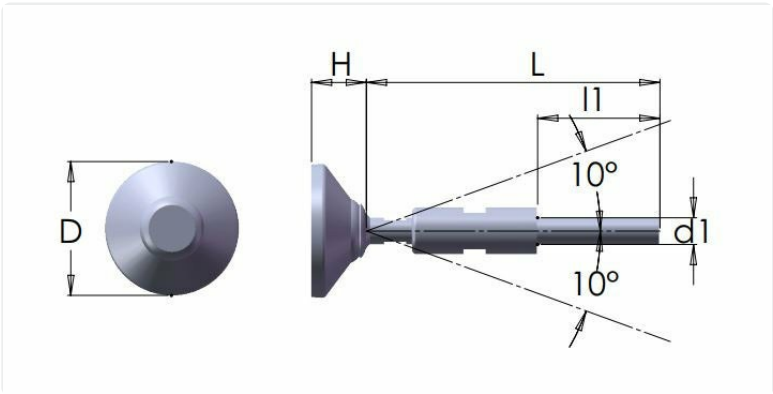

Article number	Material fasteners	Color	D	d1	H	L	I1	Max. limit static load (kg)
SF331-190-60M12X135	-	-	60	M12	28	135	55	700
SF331-190-60M12X175	-	-	60	M12	28	175	75	700
SF331-190-60M12X215	-	-	60	M12	28	215	95	700
SF331-190-60M16X135	-	-	60	M16	28	135	55	700
SF331-190-60M16X175	-	-	60	M16	28	175	75	700
SF331-190-60M16X215	-	-	60	M16	28	215	95	700
SF331-190-60M16X255	-	-	60	M16	28	255	115	700
SF331-190-60M20X135	-	-	60	M20	28	135	55	700
SF331-190-60M20X175	-	-	60	M20	28	175	75	700

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF331-190-60M20X215	-	-	60	M20	28	215	95	700
SF331-190-60M20X255	-	-	60	M20	28	255	115	700
SF331-190-80M12X135	-	-	80	M12	31.5	135	55	1500
SF331-190-80M12X175	-	-	80	M12	31.5	175	75	1500
SF331-190-80M12X215	-	-	80	M12	31.5	215	95	1500
SF331-190-80M16X135	-	-	80	M16	31.5	135	55	1500
SF331-190-80M16X175	-	-	80	M16	31.5	175	75	1500
SF331-190-80M16X215	-	-	80	M16	31.5	215	95	1500
SF331-190-80M16X255	-	-	80	M16	31.5	255	115	1500
SF331-190-80M20X135	-	-	80	M20	31.5	135	55	1500
SF331-190-80M20X175	-	-	80	M20	31.5	175	75	1500
SF331-190-80M20X215	-	-	80	M20	31.5	215	95	1500
SF331-190-80M20X255	-	-	80	M20	31.5	255	115	1500
SF331-190-80M24X135	-	-	80	M24	31.5	135	55	1500
SF331-190-80M24X175	-	-	80	M24	31.5	175	75	1500
SF331-190-80M24X215	-	-	80	M24	31.5	215	95	1500
SF331-190-80M24X255	-	-	80	M24	31.5	255	115	1500
SF331-190-80M30X135	-	-	80	M30	31.5	135	55	1500
SF331-190-80M30X175	-	-	80	M30	31.5	175	75	1500
SF331-190-80M30X215	-	-	80	M30	31.5	215	95	1500
SF331-190-80M30X255	-	-	80	M30	31.5	255	115	1500
SF331-190-100M12X135	-	-	100	M12	35	135	55	2000
SF331-190-100M12X175	-	-	100	M12	35	175	75	2000
SF331-190-100M12X215	-	-	100	M12	35	215	95	2000
SF331-190-100M16X135	-	-	100	M16	35	135	55	2000
SF331-190-100M16X175	-	-	100	M16	35	175	75	2000
SF331-190-100M16X215	-	-	100	M16	35	215	95	2000
SF331-190-100M16X255	-	-	100	M16	35	255	115	2000
SF331-190-100M20X135	-	-	100	M20	35	135	55	2000
SF331-190-100M20X175	-	-	100	M20	35	175	75	2000
SF331-190-100M20X215	-	-	100	M20	35	215	95	2000
SF331-190-100M20X255	-	-	100	M20	35	255	115	2000
SF331-190-100M24X135	-	-	100	M24	35	135	55	2000
SF331-190-100M24X175	-	-	100	M24	35	175	75	2000
SF331-190-100M24X215	-	-	100	M24	35	215	95	2000
SF331-190-100M24X255	-	-	100	M24	35	255	115	2000
SF331-190-100M30X135	-	-	100	M30	35	135	55	2000
SF331-190-100M30X175	-	-	100	M30	35	175	75	2000
SF331-190-100M30X215	-	-	100	M30	35	215	95	2000
SF331-190-100M30X255	-	-	100	M30	35	255	115	2000

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF331-190-100M36X135	-	-	100	M36	35	135	55	2000
SF331-190-100M36X175	-	-	100	M36	35	175	75	2000
SF331-190-100M36X215	-	-	100	M36	35	215	95	2000
SF331-190-100M36X255	-	-	100	M36	35	255	115	2000
SF331-190-120M16X135	-	-	120	M16	39	135	55	3000
SF331-190-120M16X175	-	-	120	M16	39	175	75	3000
SF331-190-120M16X215	-	-	120	M16	39	215	95	3000
SF331-190-120M16X255	-	-	120	M16	39	255	115	3000
SF331-190-120M20X135	-	-	120	M20	39	135	55	3000
SF331-190-120M20X175	-	-	120	M20	39	175	75	3000
SF331-190-120M20X215	-	-	120	M20	39	215	95	3000
SF331-190-120M20X255	-	-	120	M20	39	255	115	3000
SF331-190-120M24X135	-	-	120	M24	39	135	55	3000
SF331-190-120M24X175	-	-	120	M24	39	175	75	3000
SF331-190-120M24X215	-	-	120	M24	39	215	95	3000
SF331-190-120M24X255	-	-	120	M24	39	255	115	3000
SF331-190-120M30X135	-	-	120	M30	39	135	55	3000
SF331-190-120M30X175	-	-	120	M30	39	175	75	3000
SF331-190-120M30X215	-	-	120	M30	39	215	95	3000
SF331-190-120M30X255	-	-	120	M30	39	255	115	3000
SF331-190-120M36X135	-	-	120	M36	39	135	55	3000
SF331-190-120M36X175	-	-	120	M36	39	175	75	3000
SF331-190-120M36X215	-	-	120	M36	39	215	95	3000
SF331-190-120M36X255	-	-	120	M36	39	255	115	3000
SF331-190-140M16X135	-	-	140	M16	-	135	55	-
SF331-190-140M16X175	-	-	140	M16	-	175	75	-
SF331-190-140M16X215	-	-	140	M16	-	215	95	-
SF331-190-140M16X255	-	-	140	M16	-	255	115	-
SF331-190-140M20X135	-	-	140	M20	-	135	55	-
SF331-190-140M20X175	-	-	140	M20	-	175	75	-
SF331-190-140M20X215	-	-	140	M20	-	215	95	-
SF331-190-140M20X255	-	-	140	M20	-	255	115	-
SF331-190-140M24X135	-	-	140	M24	-	135	55	-
SF331-190-140M24X175	-	-	140	M24	-	175	75	-
SF331-190-140M24X215	-	-	140	M24	-	215	95	-
SF331-190-140M24X255	-	-	140	M24	-	255	115	-
SF331-190-140M30X135	-	-	140	M30	-	135	55	-
SF331-190-140M30X175	-	-	140	M30	-	175	75	-
SF331-190-140M30X215	-	-	140	M30	-	215	95	-
SF331-190-140M30X255	-	-	140	M30	-	255	115	-

Article number	Material fasteners	Color	D	d1	H	L	I1	Max. limit static load (kg)
SF331-190-140M36X135	-	-	140	M36	-	135	55	-
SF331-190-140M36X175	-	-	140	M36	-	175	75	-
SF331-190-140M36X215	-	-	140	M36	-	215	95	-
SF331-190-140M36X255	-	-	140	M36	-	255	115	-