

MACHINE LEVELLING FEET

SF631

Articulated machine foot with protective sleeve in stainless steel and hygienic design. Can handle heavy loads and can be angled 10 degrees. Hexagon grip on the screw for easy assembly and adjustment.



MATERIAL FASTENERS

Stainless steel


ADDITIONAL INFO

Material: Stainless steel

Felt: False

Articulated: True

Hexagon socket at the top: False

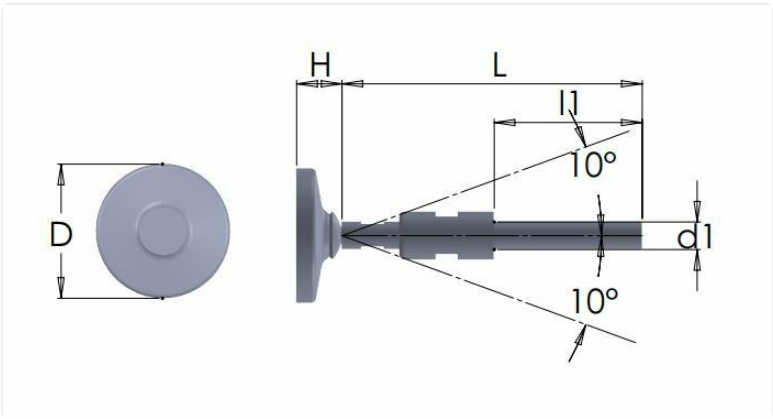

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF631-190-58M12X135	-	-	58	M12	25	135	55	1800
SF631-190-58M12X175	-	-	58	M12	25	175	75	1600
SF631-190-58M12X215	-	-	58	M12	25	215	95	1400
SF631-190-58M16X135	-	-	58	M16	25	135	55	3000
SF631-190-58M16X175	-	-	58	M16	25	175	75	2700
SF631-190-58M16X215	-	-	58	M16	25	215	95	2400
SF631-190-58M16X255	-	-	58	M16	25	255	115	2100
SF631-190-58M20X135	-	-	58	M20	25	135	55	4800

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF631-190-58M20X175	-	-	58	M20	25	175	75	4800
SF631-190-58M20X215	-	-	58	M20	25	215	95	4800
SF631-190-58M20X255	-	-	58	M20	25	255	115	4400
SF631-190-78M12X135	-	-	78	M12	25	135	55	1800
SF631-190-78M12X175	-	-	78	M12	25	175	75	1600
SF631-190-78M12X215	-	-	78	M12	25	215	95	1400
SF631-190-78M16X135	-	-	78	M16	25	135	55	3000
SF631-190-78M16X175	-	-	78	M16	25	175	75	2700
SF631-190-78M16X215	-	-	78	M16	25	215	95	2400
SF631-190-78M16X255	-	-	78	M16	25	255	115	2100
SF631-190-78M20X135	-	-	78	M20	25	135	55	4800
SF631-190-78M20X175	-	-	78	M20	25	175	75	4800
SF631-190-78M20X215	-	-	78	M20	25	215	95	4800
SF631-190-78M20X255	-	-	78	M20	25	255	115	4400
SF631-190-78M24X135	-	-	78	M24	25	135	55	6800
SF631-190-78M24X175	-	-	78	M24	25	175	75	6800
SF631-190-78M24X215	-	-	78	M24	25	215	95	6800
SF631-190-78M24X255	-	-	78	M24	25	255	115	6400
SF631-190-78M30X135	-	-	78	M30	25	135	55	11000
SF631-190-78M30X175	-	-	78	M30	25	175	75	11000
SF631-190-78M30X215	-	-	78	M30	25	215	95	11000
SF631-190-78M30X255	-	-	78	M30	25	255	115	11000
SF631-190-98M12X135	-	-	98	M12	25	135	55	1800
SF631-190-98M12X175	-	-	98	M12	25	175	75	1600
SF631-190-98M12X215	-	-	98	M12	25	215	95	1400
SF631-190-98M16X135	-	-	98	M16	25	135	55	3000
SF631-190-98M16X175	-	-	98	M16	25	175	75	2700
SF631-190-98M16X215	-	-	98	M16	25	215	95	2400
SF631-190-98M16X255	-	-	98	M16	25	255	115	2100
SF631-190-98M20X135	-	-	98	M20	25	135	55	4800
SF631-190-98M20X175	-	-	98	M20	25	175	75	4800
SF631-190-98M20X215	-	-	98	M20	25	215	95	4800
SF631-190-98M20X255	-	-	98	M20	25	255	115	4400
SF631-190-98M24X135	-	-	98	M24	25	135	55	6800
SF631-190-98M24X175	-	-	98	M24	25	175	75	6800
SF631-190-98M24X215	-	-	98	M24	25	215	95	6800
SF631-190-98M24X255	-	-	98	M24	25	255	115	6400
SF631-190-98M30X135	-	-	98	M30	25	135	55	11000
SF631-190-98M30X175	-	-	98	M30	25	175	75	11000
SF631-190-98M30X215	-	-	98	M30	25	215	95	11000

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF631-190-98M30X255	-	-	98	M30	25	255	115	11000
SF631-190-98M36X135	-	-	98	M36	25	135	55	11000
SF631-190-98M36X175	-	-	98	M36	25	175	75	11000
SF631-190-98M36X215	-	-	98	M36	25	215	95	11000
SF631-190-98M36X255	-	-	98	M36	25	255	115	11000
SF631-190-118M16X135	-	-	118	M16	25	135	55	3000
SF631-190-118M16X175	-	-	118	M16	25	175	75	2700
SF631-190-118M16X215	-	-	118	M16	25	215	95	2400
SF631-190-118M16X255	-	-	118	M16	25	255	115	2100
SF631-190-118M20X135	-	-	118	M20	25	135	55	4800
SF631-190-118M20X175	-	-	118	M20	25	175	75	4800
SF631-190-118M20X215	-	-	118	M20	25	215	95	4800
SF631-190-118M20X255	-	-	118	M20	25	255	115	4400
SF631-190-118M24X135	-	-	118	M24	25	135	55	6800
SF631-190-118M24X175	-	-	118	M24	25	175	75	6800
SF631-190-118M24X215	-	-	118	M24	25	215	95	6800
SF631-190-118M24X255	-	-	118	M24	25	255	115	6400
SF631-190-118M30X135	-	-	118	M30	25	135	55	11000
SF631-190-118M30X175	-	-	118	M30	25	175	75	11000
SF631-190-118M30X215	-	-	118	M30	25	215	95	11000
SF631-190-118M30X255	-	-	118	M30	25	255	115	11000
SF631-190-118M36X135	-	-	118	M36	25	135	55	11000
SF631-190-118M36X175	-	-	118	M36	25	175	75	11000
SF631-190-118M36X215	-	-	118	M36	25	215	95	11000
SF631-190-118M36X255	-	-	118	M36	25	255	115	11000
SF631-190-138M16X135	-	-	138	M16	26	135	55	3000
SF631-190-138M16X175	-	-	138	M16	26	175	75	2700
SF631-190-138M16X215	-	-	138	M16	26	215	95	2400
SF631-190-138M16X255	-	-	138	M16	26	255	115	2100
SF631-190-138M20X135	-	-	138	M20	26	135	55	4800
SF631-190-138M20X175	-	-	138	M20	26	175	75	4800
SF631-190-138M20X215	-	-	138	M20	26	215	95	4800
SF631-190-138M20X255	-	-	138	M20	26	255	115	4400
SF631-190-138M24X135	-	-	138	M24	26	135	55	6800
SF631-190-138M24X175	-	-	138	M24	26	175	75	6800
SF631-190-138M24X215	-	-	138	M24	26	215	95	6800
SF631-190-138M24X255	-	-	138	M24	26	255	115	6400
SF631-190-138M30X135	-	-	138	M30	26	135	55	11000
SF631-190-138M30X175	-	-	138	M30	26	175	75	11000
SF631-190-138M30X215	-	-	138	M30	26	215	95	11000

Article number	Material fasteners	Color	D	d1	H	L	l1	Max. limit static load (kg)
SF631-190-138M30X255	-	-	138	M30	26	255	115	11000
SF631-190-138M36X135	-	-	138	M36	26	135	55	11000
SF631-190-138M36X175	-	-	138	M36	26	175	75	11000
SF631-190-138M36X215	-	-	138	M36	26	215	95	11000
SF631-190-138M36X255	-	-	138	M36	26	255	115	11000
SF631-190-158M16X135	-	-	158	M16	27	135	55	3000
SF631-190-158M16X175	-	-	158	M16	27	175	75	2700
SF631-190-158M16X215	-	-	158	M16	27	215	95	2400
SF631-190-158M16X255	-	-	158	M16	27	255	115	2100
SF631-190-158M20X135	-	-	158	M20	27	135	55	4800
SF631-190-158M20X175	-	-	158	M20	27	175	75	4800
SF631-190-158M20X215	-	-	158	M20	27	215	95	4800
SF631-190-158M20X255	-	-	158	M20	27	255	115	4400
SF631-190-158M24X135	-	-	158	M24	27	135	55	6800
SF631-190-158M24X175	-	-	158	M24	27	175	75	6800
SF631-190-158M24X215	-	-	158	M24	27	215	95	6800
SF631-190-158M24X255	-	-	158	M24	27	255	115	6400
SF631-190-158M30X135	-	-	158	M30	27	135	55	11000
SF631-190-158M30X175	-	-	158	M30	27	175	75	11000
SF631-190-158M30X215	-	-	158	M30	27	215	95	11000
SF631-190-158M30X255	-	-	158	M30	27	255	115	11000
SF631-190-158M36X135	-	-	158	M36	27	135	55	11000
SF631-190-158M36X175	-	-	158	M36	27	175	75	11000
SF631-190-158M36X215	-	-	158	M36	27	215	95	11000
SF631-190-158M36X255	-	-	158	M36	27	255	115	11000